

# Pİ TOWER 192


## Pİ KULE 192

Free Standing at 66,1 meter  
66.1 metrede SERBEST DURAN


Maksimum kaldırma kapasitesi  
Max. lifting capacity **10.000 kg**

En uçta Maks. kaldırma kapasitesi  
Max. Lifting capacity at jib end **2.310 kg**

Maksimum çalışma yarıçapı  
Max. working radius **65.0 m**

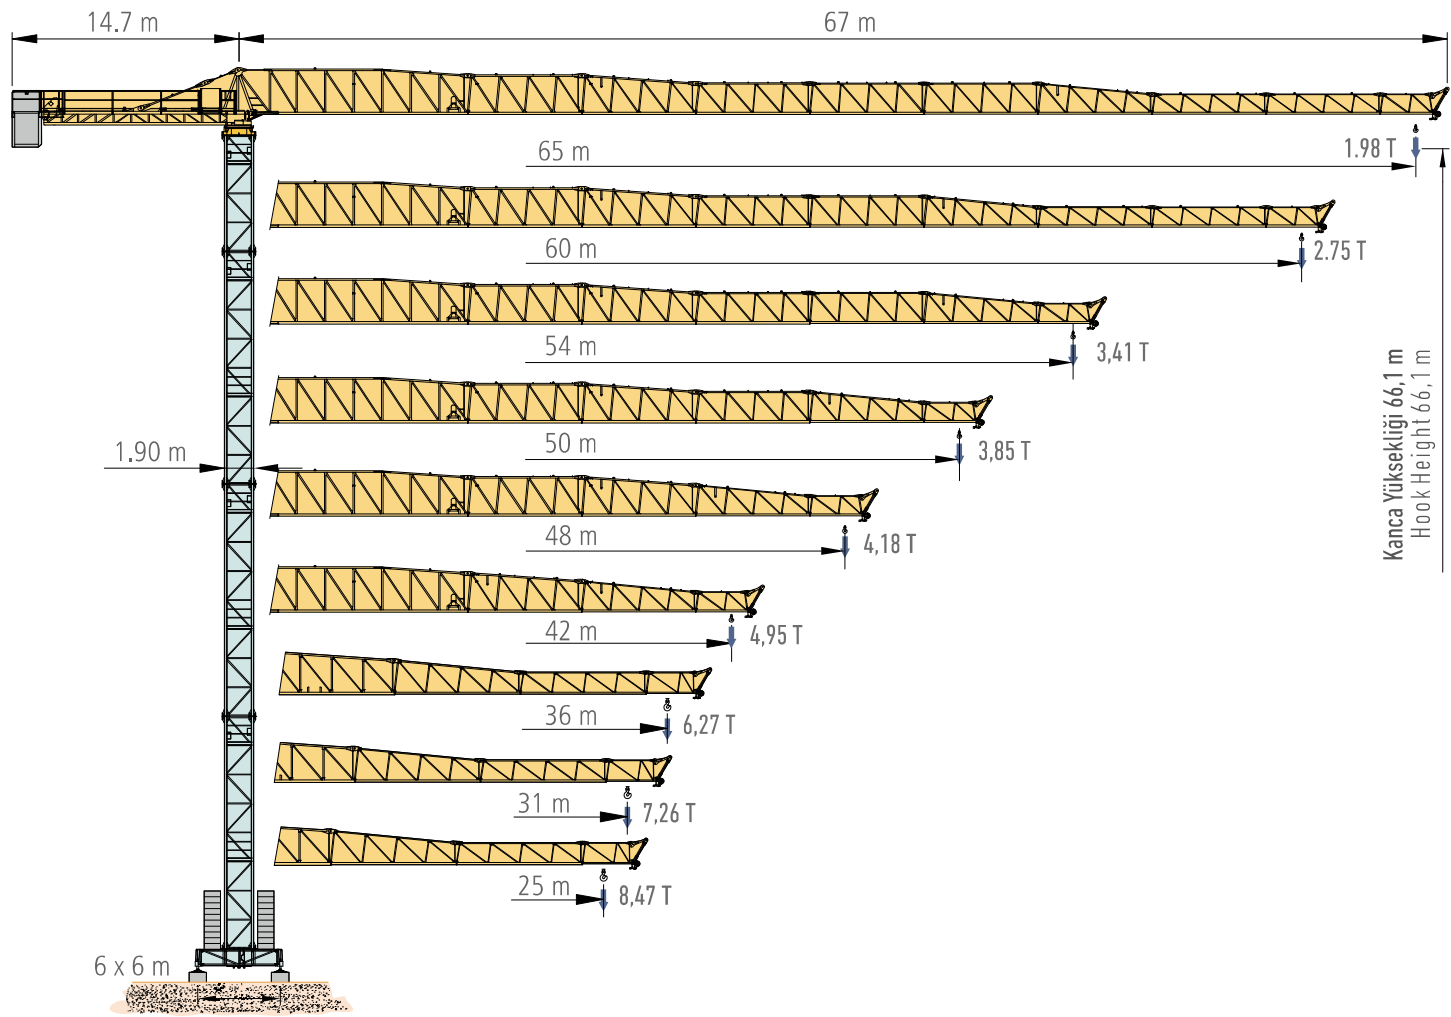


SEVİYELEMELİ  
SABİT TABLA TİP 1  
ADJUSTABLE FIXED  
BASE TYPE 1



A	51,1 m	66,0 m
B	4,5 x 4,5	6 x 6
C	1,90	1,90

TEMELE KURULUM


FOUNDATION ELEMENT



A	49,5	58,3	64,2
B			
C	1,9	1,9	1,9


HAREKETLİ TABLA

TRAVELLING BASE

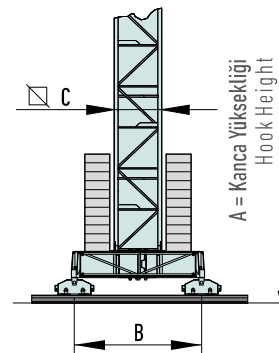

A	50,9	65,8
B	4,5 x 4,5	6 x 6
C	1,9	1,9


## Climbing Type , Free Standing at 66,1 meter Kendi Kendine Yükselen 66.1 metrede SERBEST DURAN

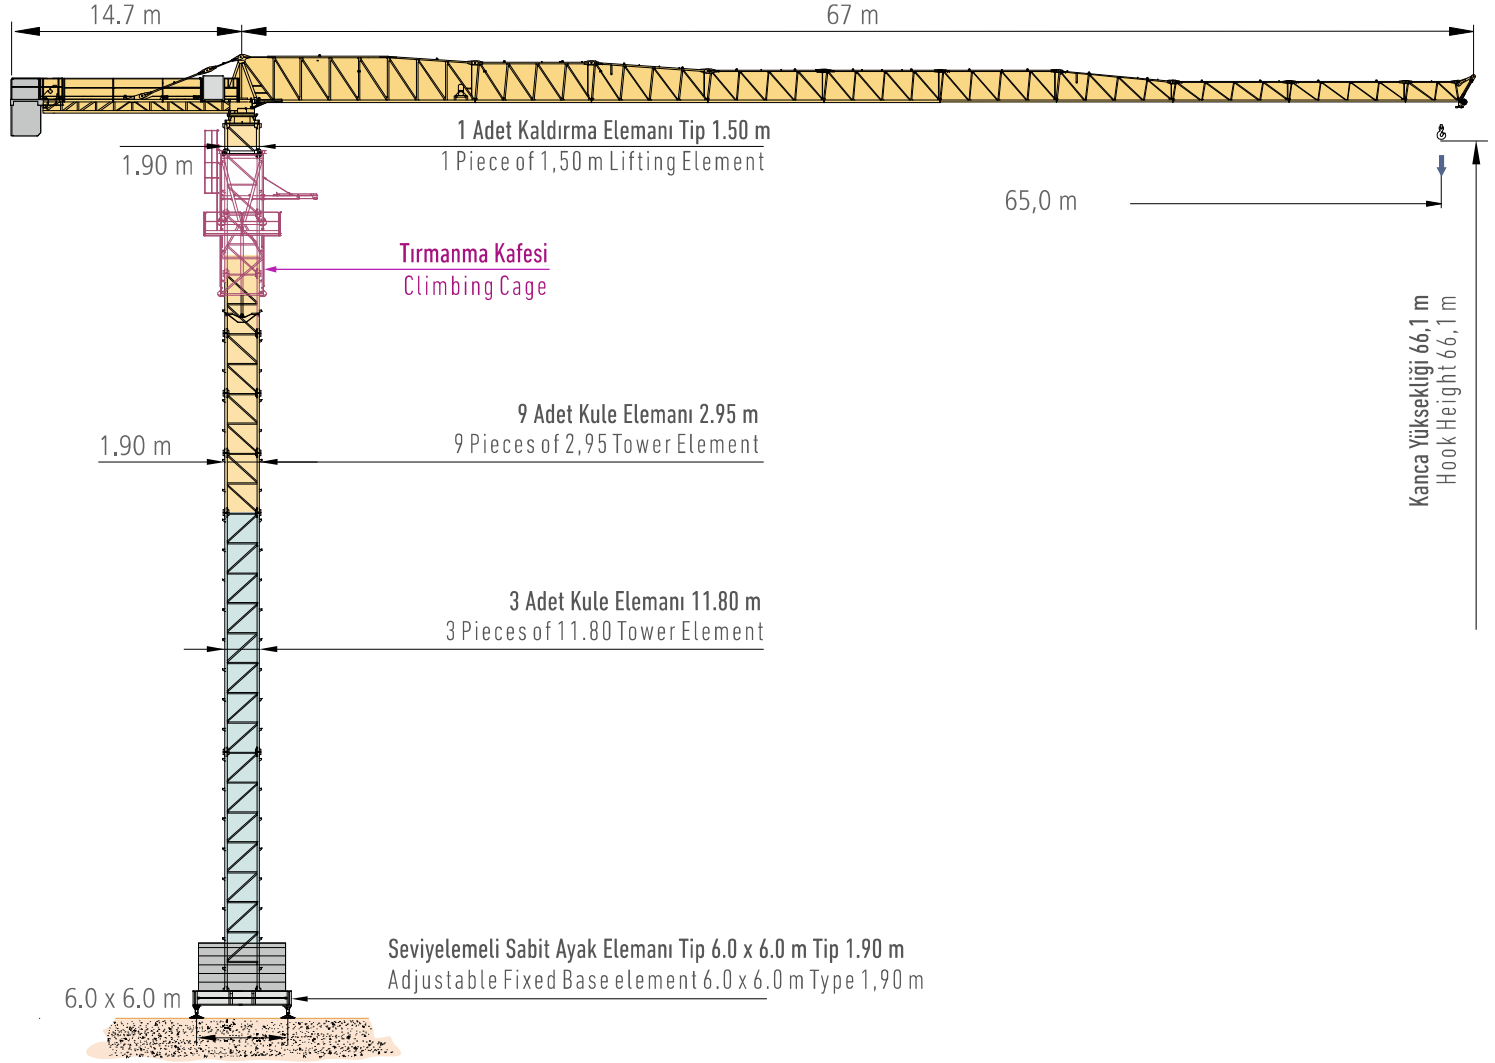

# Pİ TOWER 192

## Pİ KULE 192

### Self Climbing Type Kendi Kendine Yükselen

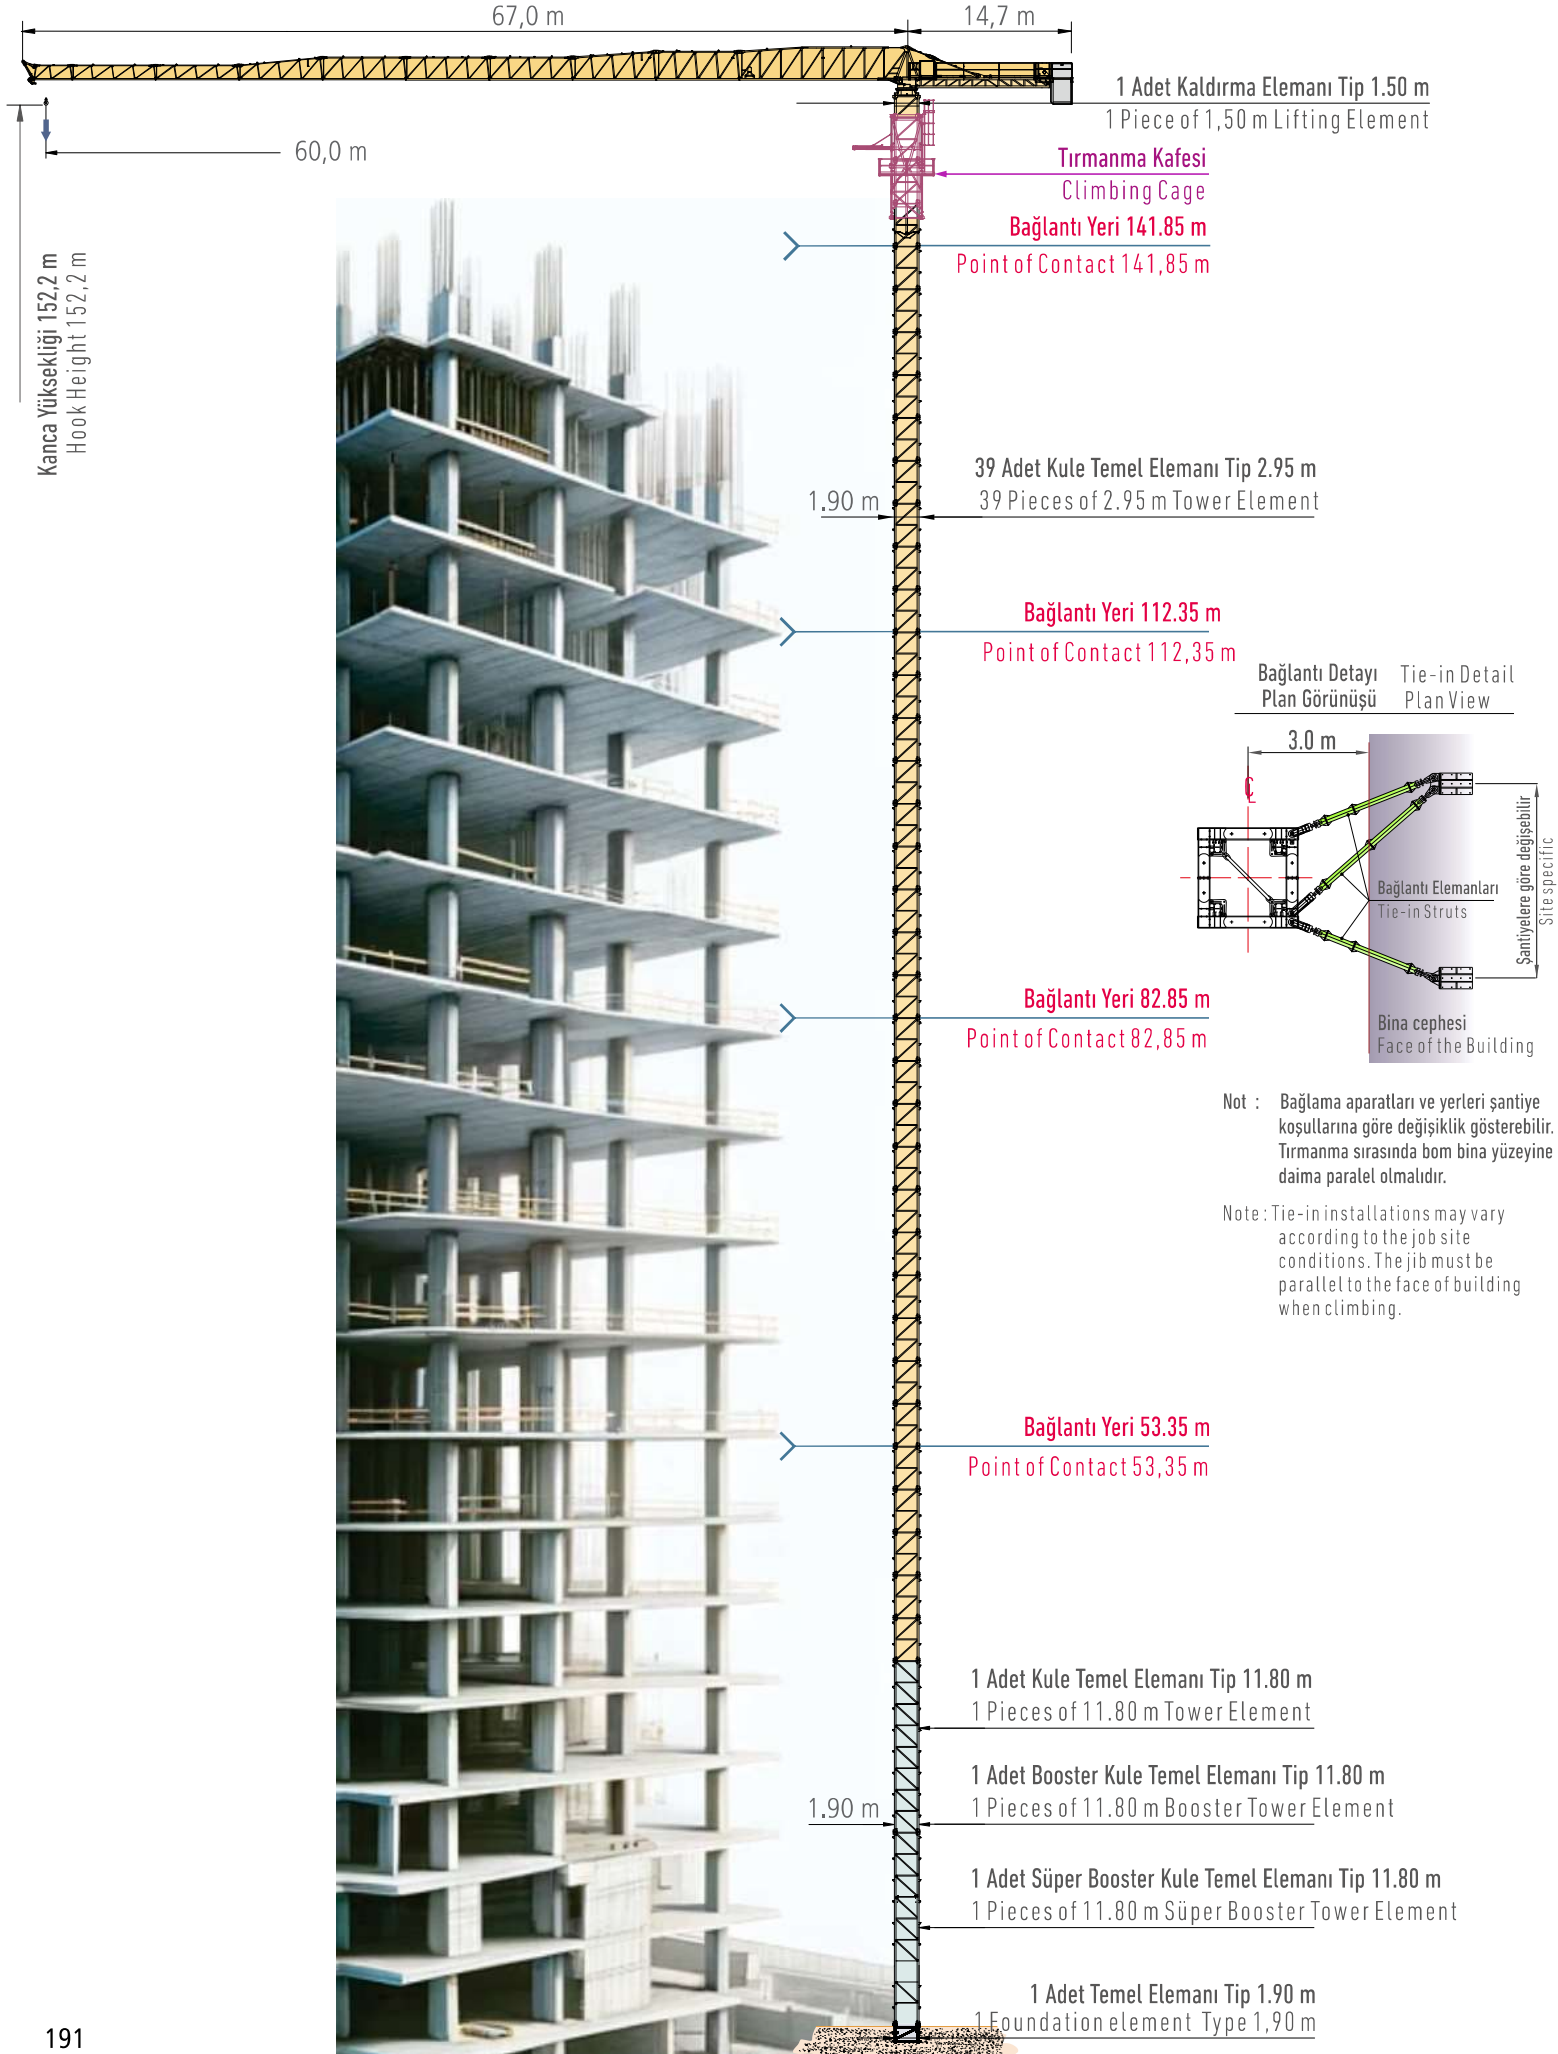




# Pİ TOWER 192








## Pİ KULE 192

### Load Diagram

### Yük Diyagramı

Maksimum Güvenli Çalışma Yüğü Max. Safely Working Load		10.000 kg 									
Maksimum Güvenli Çalışma Yüğü Mesafesi Max. Safely Working Load Range		Bom (m)		Jib (m)							
		25	31	36	42	48	50	54	60	65	
Yarıçap (m) Radius (m)	2	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	4	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	6	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	8	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	10	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	12	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	14	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	16	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	18	10000	10000	10000	10000	10000	10000	10000	10000	10000	
	20	10000	10000	10000	10000	10000	10000	10000	10000	9028	
	22	9818	10000	10000	10000	10000	10000	10000	10000	9524	8077
	24	8880	9766	10000	9594	9573	9321	9152	8612	7290	
	25	8470	9319	9593	9155	9184	8893	8730	8213	6946	
	26		8907	9170	8750	8730	8498	8372	7845	6629	
	28		8175	8419	8029	8011	7796	7652	7192	6065	
	30		7544	7771	7408	7391	7191	7057	6628	5579	
	31		7260	7429	7128	7112	6919	6789	6374	5360	
	32			7206	6867	6851	6664	6538	6137	5155	
	34			6710	6391	6376	6200	6082	5705	4782	
	36			6270	5969	5955	5789	5678	5322	4452	
	38				5593	5579	5423	5317	4981	4158	
	40				5255	5242	5093	4993	4674	3893	
	42				4950	4938	4796	4701	4398	3655	
	44					4662	4527	4436	4147	3438	
	46					4410	4281	4194	3918	3241	
48					4180	4056	3973	3709	3060		
50						3850	3370	3516	2894		
52							3583	3339	2741		
54							3410	3175	2600		
56								3023	2469		
58								2882	2347		
60								2750	2233		
62									2127		
64									2027		
65									1980		

## Technical Specifications Teknik Özellikler

		Hız Speed	Güç Power					
Kule Dönüş Hızı Tower Slewing Speed		0,70 r.p.m	2 x 65 N.m					
Araba Hızı Trolley Speed		0 - 83 m/min	5.5 kW					
Yürüyüş Hızı Travelling Speed		0 - 19 m/min	4 x 4 kW					
Tip Type	Güç Power		Kablo Cable m	Adım Step				
	CV - ch PS - hp	kW			Yükleme Load kg	Hız Speed m/min	Yükleme Load kg	Hız Speed m/min
	50	37	337	1	5000	11	10000	5
				2	5000	22	10000	11
				3	5000	36	10000	18
				4	2980	61	6100	31
				5	930	115	1990	58
				6	630	131	1390	65
	50	37	541	1	5000	11	10000	5
				2	5000	21	10000	11
				3	5000	34	10000	17
				4	2240	76	4430	38
				5	1010	110	2080	55
				6	600	128	1340	64
Toplam Güç İhtiyacı Total Installed Power			37 kW (50 HP)			37,0 kW (50 HP)		

