



Machine Dimensions Genel Ölçüler

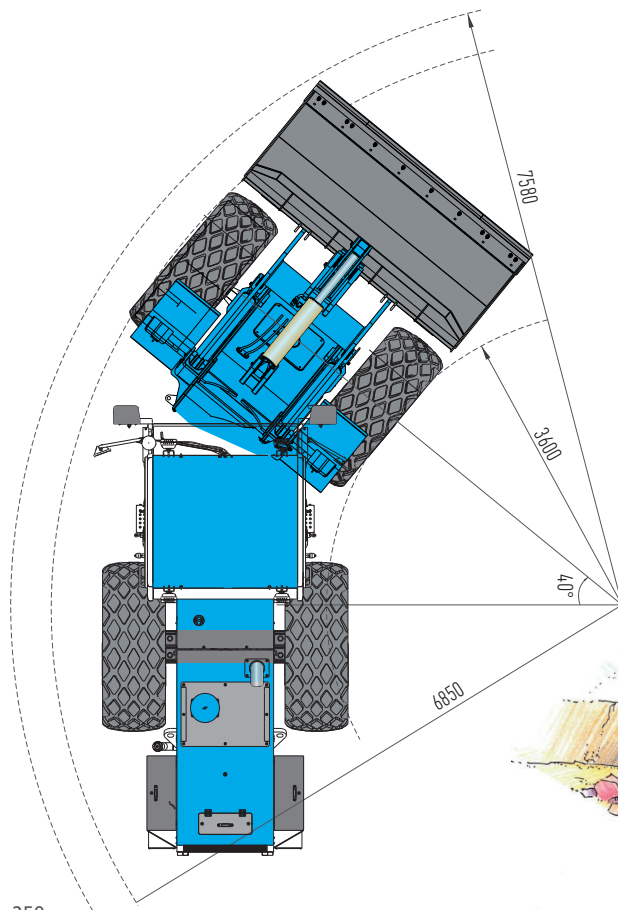

Specifications Özellikler

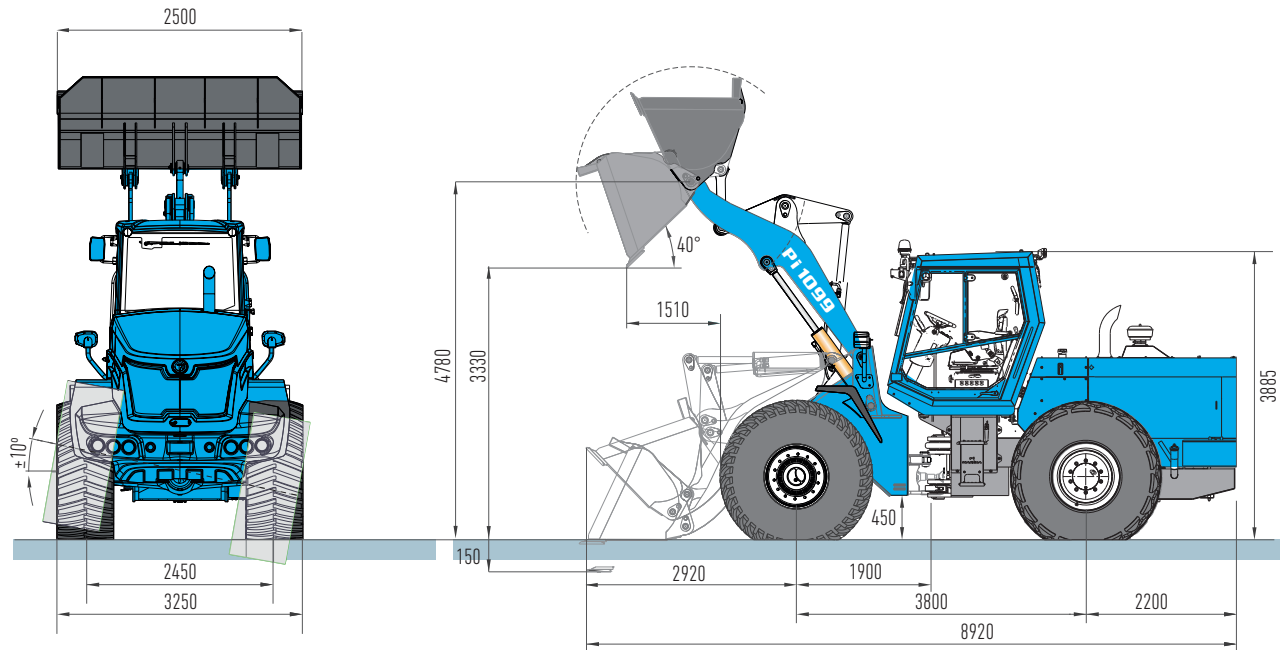

Motor

Engine

Tip Type	Direction injection, water cooled, 4-cycle diesel engine with turbocharger
Hacim ve Silindir Sayısı Disp. and No. of Cylinders	6 @ 18,9 lt
Güç Power	335 kW (450 HP) @ 2100 rpm
Çap ve Strok Bore and Stroke	159 mm x 159 mm
Azami Tork Max Torque	1831 N.m @ 1500 rpm



Teknik Özellikler Technical Properties

Kepçe Kapasitesi Bucket Capacity Heaped	8,0 m ³
Toplam Ağırlığı Operating Weight	39.500 kg
Koparma Kuvveti Breakout Force	26.650 kg
Yerden Yükseklik Ground Clearance	450 mm



Hidrolik Sistem Hydraulic System

Pompa Tipi Pump Type	Paletli Vane
Çalışma Basıncı Operating Pressure	160 bar
Kapasite Flow Rate	610 lt per min
Kaldırma Silindirleri Lifting Cylinders	230 mm x 1070 mm (çap x strok) (bore x stroke)
Devrilme Silindirleri Tilting Cylinders	210 mm x 850 mm (çap x strok) (bore x stroke)



Akslar

Axles

Tip Type	4x4 Yürüyüş sistemi Four Wheel Drive
Ön Aks Front Axle	Sabit Ön Aks Rigid Front Axle
Arka Aks Rear Axle	Arka Aks Salınımı $\pm 10^\circ$ (toplam 20°) Rear Axle Oscillation $\pm 10^\circ$ (total 20°)



Direksiyon Sistemi Steering System

Direksiyon Sistemi Steering System	Hydrostatik direksiyon. Belden kırma şase. Hydrostatic Steering. Articulated Frame
Pompa Tipi Pump Type	Paletli Vane
Çalışma Basıncı Operating Pressure	130 bar
Kapasite Flow Rate	210 lt per min
Silindirler (çap x strok) Cylinders (bore x stroke)	120 mm x 438 mm



Şanzıman

Transmission

Şanzıman Tipi Transmission Type	Powershift		
Yürüyüş Freni Travel Brakes	Hava-Hidrolik Disk Freni Air-Hydraulic Disc Brake		
Park Freni Park Brakes	Kampana tipinde ön aksa mekanik kumanda Front axle in drum type, mechanical controlled		
Hız Speed	1. Vites 1 th Gear	5,7 km/h	ileri / forward geri / reverse
Hız Speed	2. Vites 2 nd Gear	10,8 km/h	ileri / forward geri / reverse
Hız Speed	3. Vites 3 rd Gear	20,1 km/h	ileri / forward geri / reverse
Hız Speed	4. Vites 4 th Gear	37,5 km/h	ileri / forward geri / reverse

